


JD-55ZYT12-3343

Magnet (磁铁): Ferrite 铁氧体
 Insulation Class 绝缘等级: B , F
 Protection 防护等级: No
 Shaft OD 出轴直径: 8 ~ 12mm
 Bearing 轴承: Ball / Sleeve
 Winding 绕线选择:


1. 工作电压范围: 6 ~ 36VDC
2. 额定转速范围: 2,000 ~ 15,000 RPM
3. 输出功率范围: 25 ~ 120 W



Motor Dimensions (外形尺寸图)

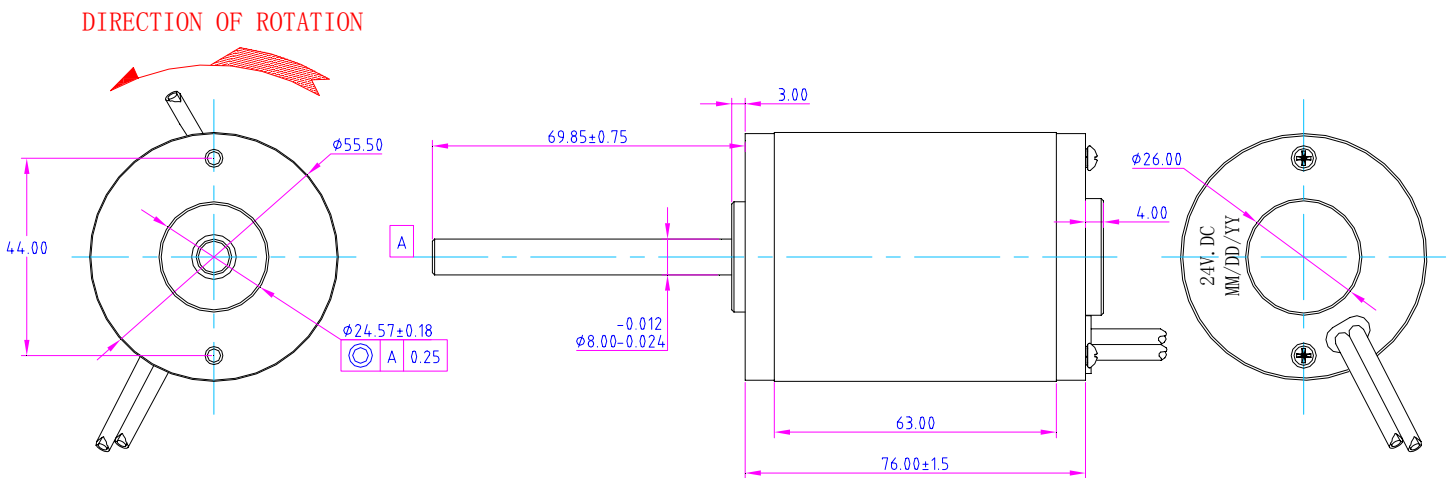

Motor Test Curve (电机特性曲线)

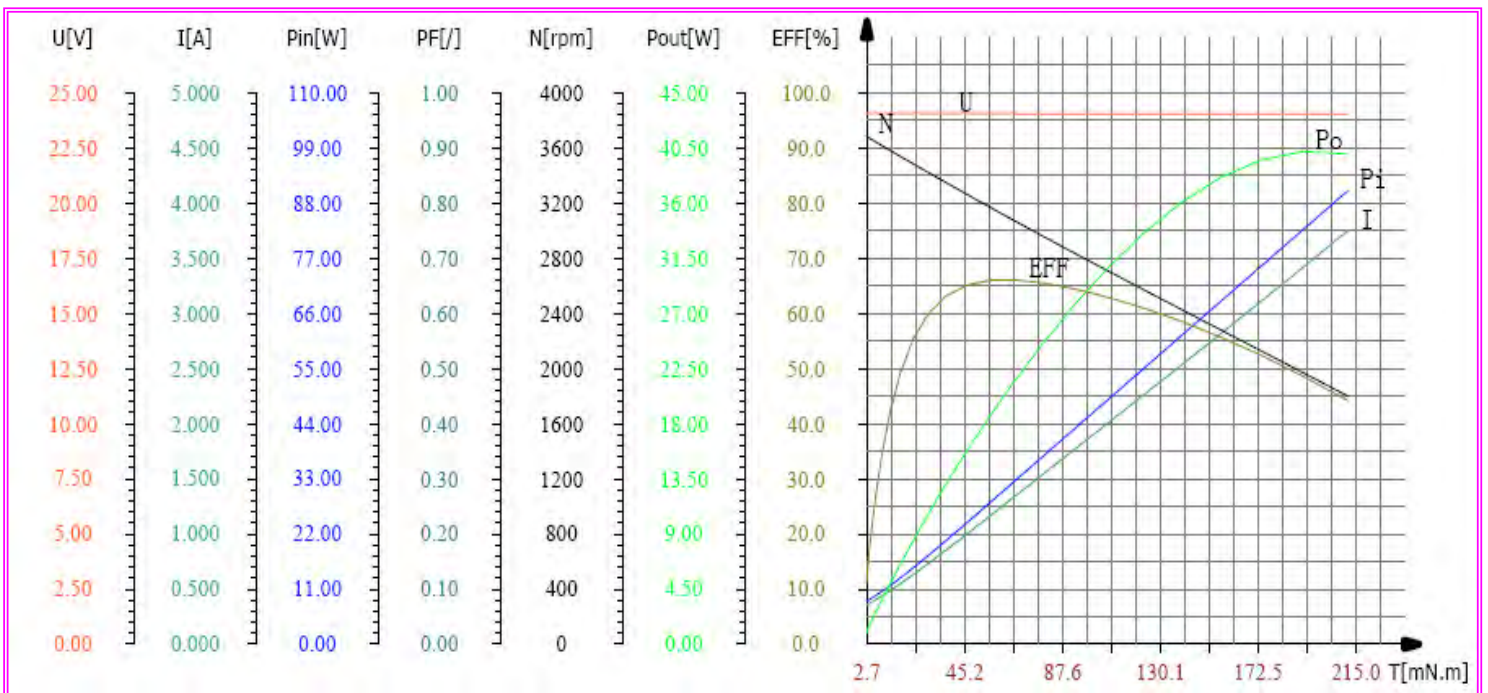

Jundi DC Motor CO.,LTD

• Motor Dynamic Test Data (电机动态测试数据)

项次NO.	电压V	电流A	输入功率W	功率因数PF	频率Hz	转矩mN. m	转速rpm	输出功率W	效率%
1	24.06	0.365	8.72	1.000	0.00	2.7	3686	1.04	11.9
2	24.06	0.363	8.69	1.000	0.00	2.7	3686	1.04	12.0
3	24.06	0.362	8.66	1.000	0.00	2.7	3686	1.04	12.0
4	24.06	0.361	8.63	1.000	0.00	2.7	3686	1.04	12.1
5	24.06	0.360	8.62	1.000	0.00	2.7	3686	1.04	12.1
6	24.06	0.362	8.66	1.000	0.00	2.9	3684	1.12	12.9
7	24.06	0.367	8.80	1.000	0.00	3.5	3677	1.35	15.3
8	24.06	0.383	9.19	1.000	0.00	4.2	3670	1.61	17.6
9	24.06	0.406	9.75	1.000	0.00	5.7	3653	2.18	22.4
10	24.06	0.440	10.58	1.000	0.00	7.9	3609	2.99	28.2
11	24.06	0.486	11.71	1.000	0.00	14.3	3584	5.37	45.8
12	24.06	0.546	13.18	1.000	0.00	15.0	3564	5.60	42.5
13	24.06	0.625	15.09	1.000	0.00	22.9	3478	8.34	55.3
14	24.06	0.701	16.94	1.000	0.00	29.8	3410	10.64	62.8
15	24.06	0.841	20.33	1.000	0.00	37.6	3368	13.26	65.2
16	24.05	0.964	23.27	1.000	0.00	46.8	3269	16.02	68.8
17	24.05	1.218	29.49	1.000	0.00	54.9	3159	18.16	61.6
18	24.05	1.364	33.23	1.000	0.00	66.8	3049	21.33	64.2
19	24.05	1.510	36.92	1.000	0.00	79.7	2984	24.90	67.4
20	24.05	1.771	43.16	1.000	0.00	94.2	2839	28.00	64.9
21	24.05	2.046	49.48	1.000	0.00	106.3	2696	30.01	60.7
22	24.05	2.254	54.86	1.000	0.00	123.1	2547	32.83	59.8
23	24.05	2.568	62.07	1.000	0.00	140.3	2447	35.95	57.9
24	24.05	2.799	67.98	1.000	0.00	158.5	2265	37.59	55.3
25	24.04	3.145	75.94	1.000	0.00	173.3	2092	37.96	50.0
26	24.04	3.392	82.27	1.000	0.00	192.5	1995	40.21	48.9
27	24.04	3.749	90.43	1.000	0.00	211.5	1795	39.75	44.0

地址：浙江省余姚市经济开发区B区横三路。TEL：0574-62820655/62831828, FAX：0574-62823099

E-mail: jundi@mail.nbptt.zj.cn / jundi@vip.163.com 网址: <http://www.jdmotor.com>