


JD-78ZYT12-5137

Magnet (磁铁): Ferrite 铁氧体
 Insulation Class 绝缘等级: B , F
 Protection 防护等级: No
 Shaft OD 出轴直径: 8 ~ 12mm
 Bearing 轴承: Ball / Sleeve
 Winding 绕线选择:


1. 工作电压范围: 6 ~ 36VDC
2. 额定转速范围: 2,000 ~ 8000 RPM
3. 输出功率范围: 30 ~ 300 W



Motor Dimensions (外形尺寸图)

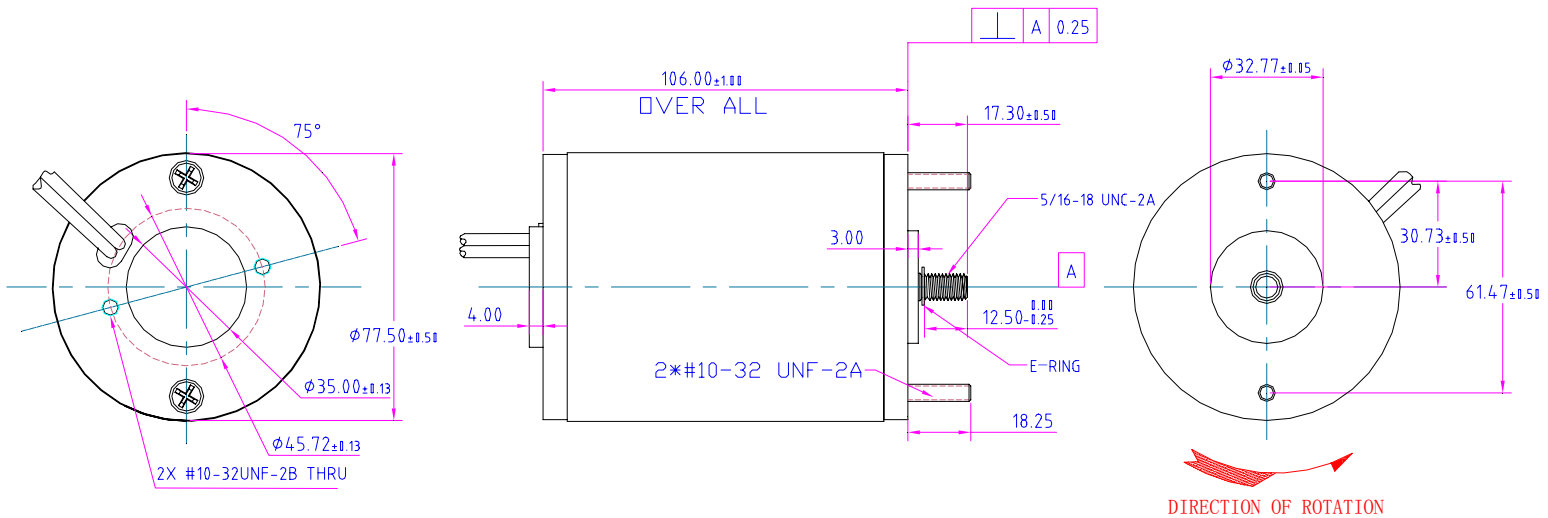

Motor Test Curve (电机特性曲线)

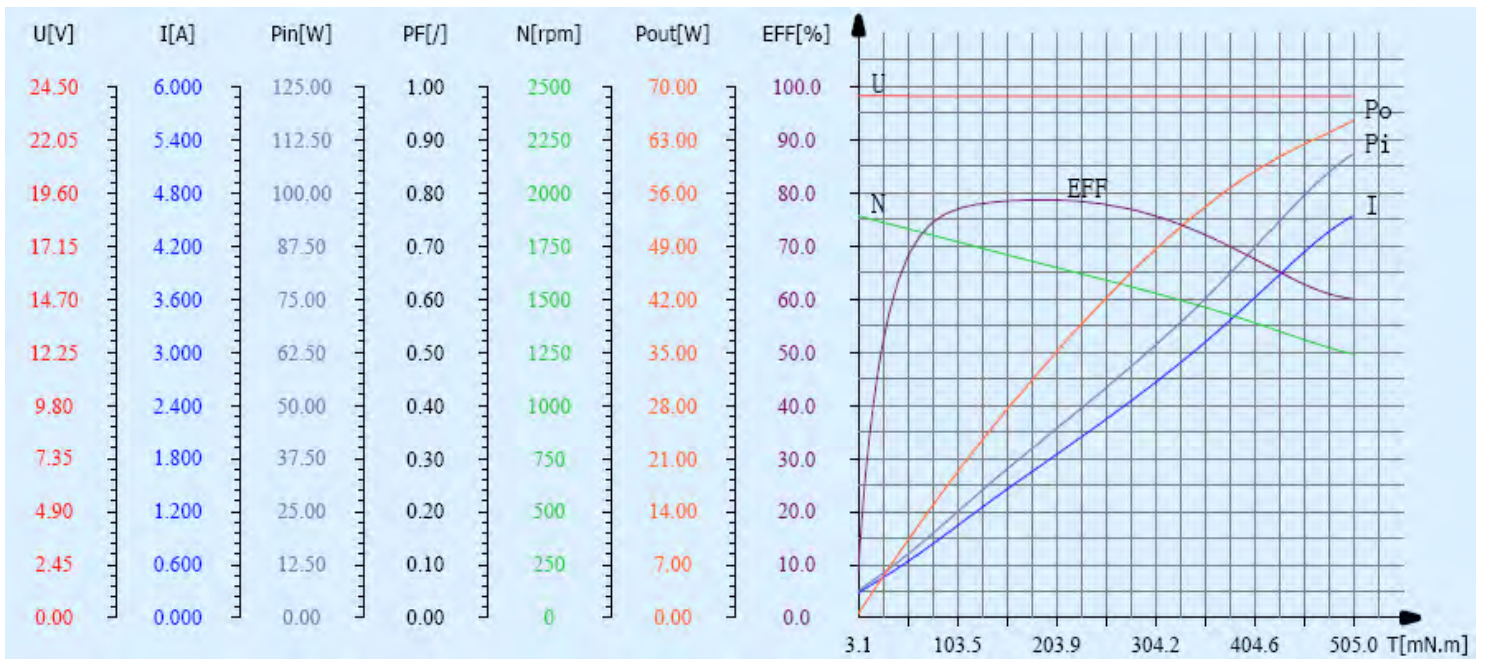

Jundi DC Motor CO.,LTD

• Motor Dynamic Test Data (电机动态测试数据)

项次NO.	电压V	电流A	输入功率W	功率因数PF	频率Hz	转矩mN.m	转速rpm	输出功率W	效率%
1	24.07	0.285	6.38	1.000	0.00	3.1	1894	0.61	9.6
2	24.07	0.285	6.38	1.000	0.00	3.1	1893	0.61	9.6
3	24.07	0.284	6.35	1.000	0.00	3.1	1893	0.61	9.7
4	24.07	0.283	6.33	1.000	0.00	3.1	1894	0.61	9.7
5	24.07	0.282	6.32	1.000	0.00	3.1	1893	0.61	9.7
6	24.07	0.283	6.32	1.000	0.00	3.2	1893	0.63	10.0
7	24.07	0.284	6.35	1.000	0.00	3.3	1894	0.65	10.3
8	24.07	0.288	6.46	1.000	0.00	3.9	1891	0.77	12.0
9	24.07	0.295	6.64	1.000	0.00	4.8	1889	0.95	14.3
10	24.07	0.305	6.89	1.000	0.00	5.6	1887	1.11	16.1
11	24.07	0.319	7.23	1.000	0.00	7.2	1885	1.42	19.7
12	24.07	0.339	7.70	1.000	0.00	13.6	1882	2.68	34.8
13	24.06	0.365	8.32	1.000	0.00	14.5	1878	2.85	34.3
14	24.06	0.405	9.23	1.000	0.00	15.9	1873	3.12	33.8
15	24.06	0.447	10.23	1.000	0.00	24.5	1866	4.79	46.8
16	24.06	0.500	11.53	1.000	0.00	36.3	1856	7.05	61.2
17	24.06	0.562	13.05	1.000	0.00	46.3	1837	8.91	68.3
18	24.06	0.634	14.82	1.000	0.00	46.9	1831	8.99	60.7
19	24.06	0.717	16.98	1.000	0.00	66.1	1813	12.55	73.9
20	24.06	0.810	19.24	1.000	0.00	82.1	1795	15.43	80.2
21	24.06	0.936	22.49	1.000	0.00	82.2	1790	15.41	68.5
22	24.06	1.070	25.66	1.000	0.00	109.4	1770	20.28	79.0
23	24.06	1.202	28.88	1.000	0.00	130.2	1749	23.85	82.6
24	24.06	1.348	32.42	1.000	0.00	152.2	1726	27.51	84.9
25	24.06	1.488	35.90	1.000	0.00	143.9	1707	25.72	71.6
26	24.06	1.653	39.90	1.000	0.00	179.7	1680	31.61	79.2
27	24.06	1.829	44.12	1.000	0.00	185.8	1650	32.10	72.8

地址：浙江省余姚市经济开发区B区横三路。TEL：0574-62820655/62831828，FAX：0574-62823099

E-mail：jundi@mail.nbptt.zj.cn / jundi@vip.163.com 网址：<http://www.jdmotor.com>

