


JD-63ZYT10-5725


Magnet (磁铁): Ferrite 铁氧体
 Insulation Class 绝缘等级: B , F
 Protection 防护等级: No
 Shaft OD 出轴直径: 8 ~ 12mm
 Bearing 轴承: Ball / Sleeve
 Winding 绕线选择:
 1. 工作电压范围: 6 ~ 36VDC
 2. 额定转速范围: 2,000 ~ 12,000 RPM
 3. 输出功率范围: 25 ~ 150 W



Motor Dimensions (外形尺寸图)

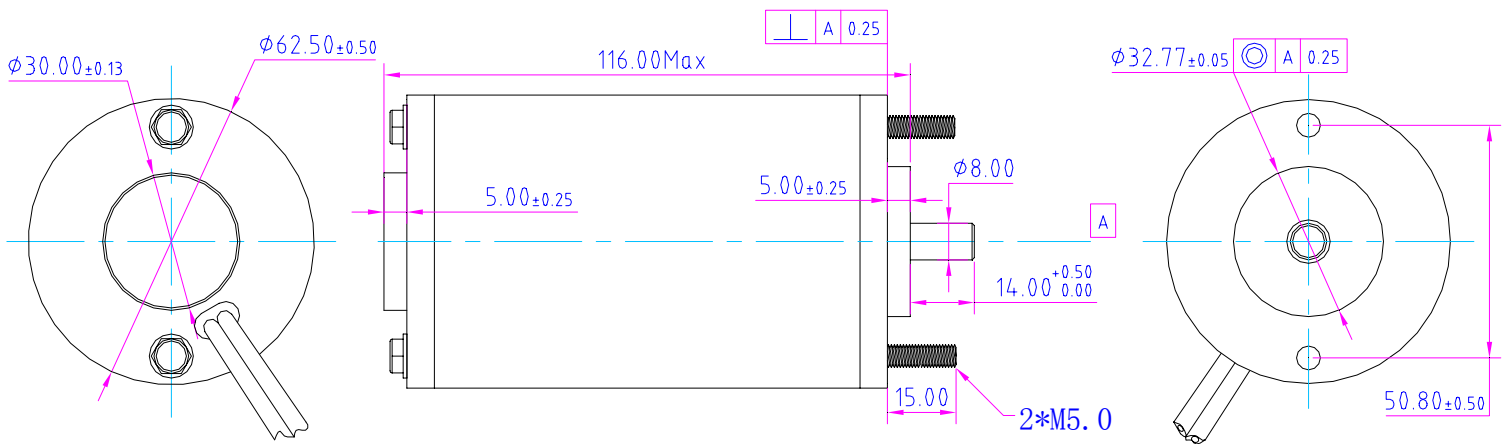

Motor Test Curve (电机特性曲线)

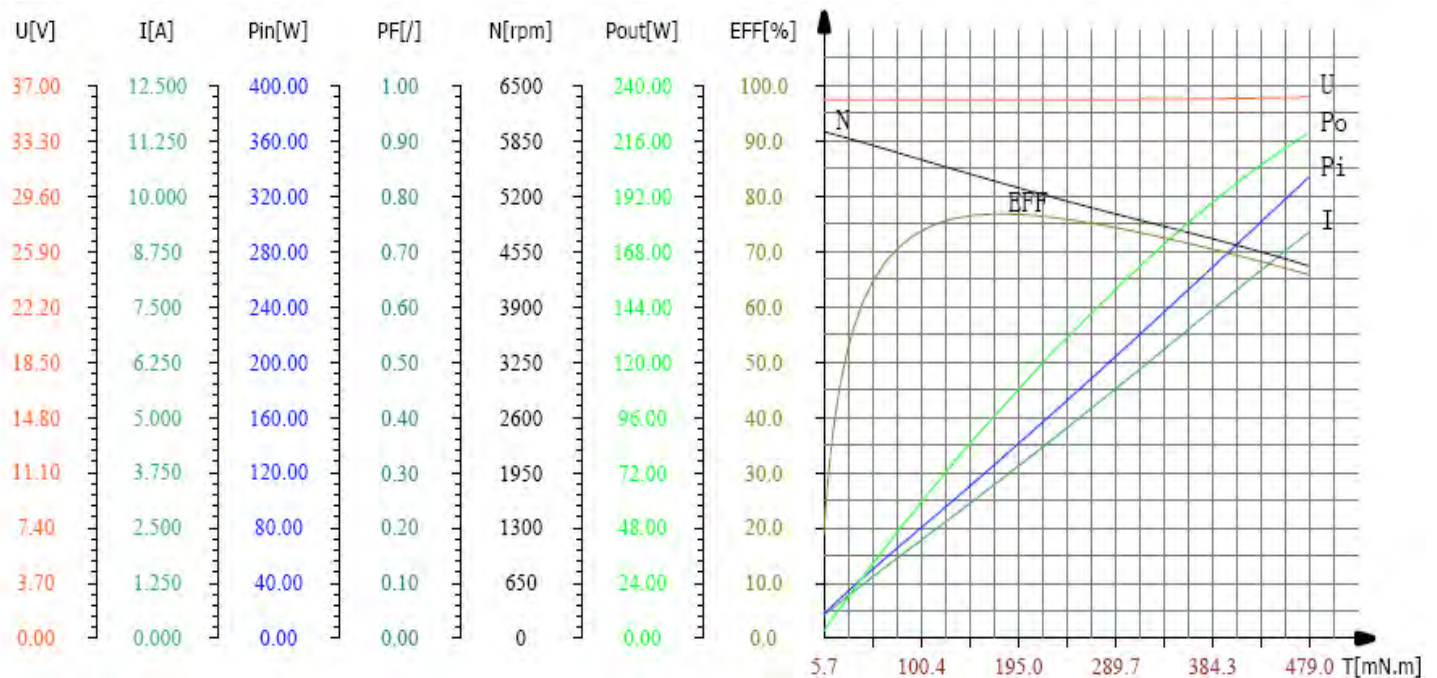

Jundi DC Motor CO.,LTD

• Motor Dynamic Test Data (电机动态测试数据)

项次NO.	电压V	电流A	输入功率W	功率因数PF	频率Hz	转矩mN.m	转速rpm	输出功率W	效率%
1	36.06	0.536	18.10	1.000	0.00	5.8	5958	3.62	20.0
2	36.06	0.536	18.09	1.000	0.00	5.8	5958	3.62	20.0
3	36.06	0.536	18.10	1.000	0.00	5.8	5960	3.62	20.0
4	36.06	0.536	18.05	1.000	0.00	5.7	5962	3.56	19.7
5	36.06	0.534	17.92	1.000	0.00	5.7	5961	3.56	19.9
6	36.06	0.533	18.00	1.000	0.00	5.8	5961	3.62	20.1
7	36.06	0.542	18.34	1.000	0.00	6.1	5962	3.81	20.8
8	36.06	0.555	18.80	1.000	0.00	6.9	5957	4.30	22.9
9	36.06	0.587	20.06	1.000	0.00	8.5	5948	5.29	26.4
10	36.06	0.626	21.60	1.000	0.00	11.0	5928	6.83	31.6
11	36.06	0.694	24.21	1.000	0.00	17.0	5918	10.53	43.5
12	36.06	0.837	29.71	1.000	0.00	22.2	5896	13.71	46.1
13	36.06	0.970	34.35	1.000	0.00	27.7	5879	17.05	49.6
14	36.06	1.082	38.41	1.000	0.00	35.1	5866	21.56	56.1
15	36.06	1.224	43.86	1.000	0.00	44.3	5839	27.09	61.8
16	36.06	1.412	50.69	1.000	0.00	51.3	5814	31.23	61.6
17	36.06	1.605	58.05	1.000	0.00	66.3	5746	39.89	68.7
18	36.06	1.855	66.61	1.000	0.00	77.5	5724	46.45	69.7
19	36.06	2.103	75.76	1.000	0.00	94.0	5651	55.62	73.4
20	36.06	2.411	87.19	1.000	0.00	114.9	5576	67.09	76.9
21	36.06	2.785	100.71	1.000	0.00	128.4	5503	73.99	73.5
22	36.06	3.089	111.44	1.000	0.00	150.1	5446	85.60	76.8
23	36.06	3.528	127.39	1.000	0.00	172.6	5378	97.20	76.3
24	36.06	3.874	140.40	1.000	0.00	197.7	5313	109.99	78.3
25	36.06	4.389	158.54	1.000	0.00	220.0	5216	120.16	75.8
26	36.06	4.803	173.81	1.000	0.00	246.3	5128	132.25	76.1
27	36.06	5.360	193.70	1.000	0.00	274.3	5053	145.13	74.9

地址：浙江省余姚市经济开发区B区横三路。TEL：0574-62820655/62831828，FAX：0574-62823099

E-mail：jundi@mail.nbptt.zj.cn / jundi@vip.163.com 网址：<http://www.jdmotor.com>

