


## JD-63ZYT12-4730

Magnet (磁铁): Ferrite 铁氧体  
 Insulation Class 绝缘等级: B , F  
 Protection 防护等级: No  
 Shaft OD 出轴直径: 8 ~ 12mm  
 Bearing 轴承: Ball / Sleeve  
 Winding 绕线选择:


- 1.工作电压范围: 6 ~ 36VDC
- 2.额定转速范围: 2,000 ~ 12,000 RPM
- 3.输出功率范围: 25 ~ 150 W



### Motor Dimensions (外形尺寸图)

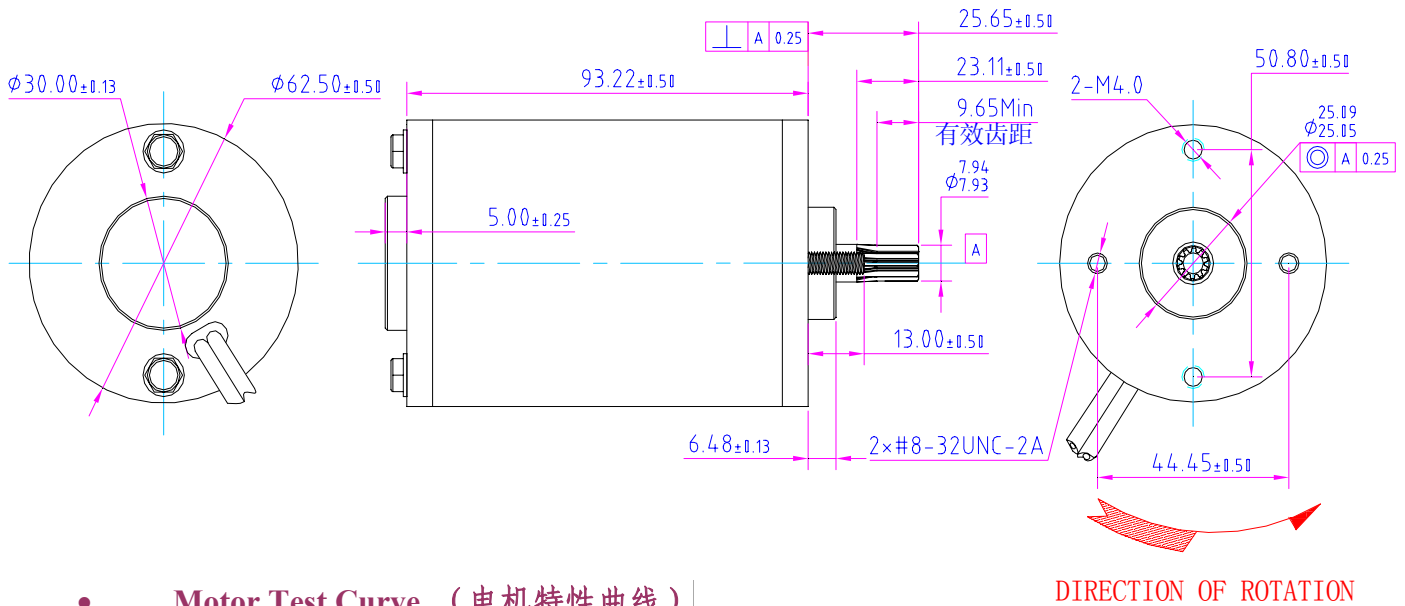

### Motor Test Curve (电机特性曲线)

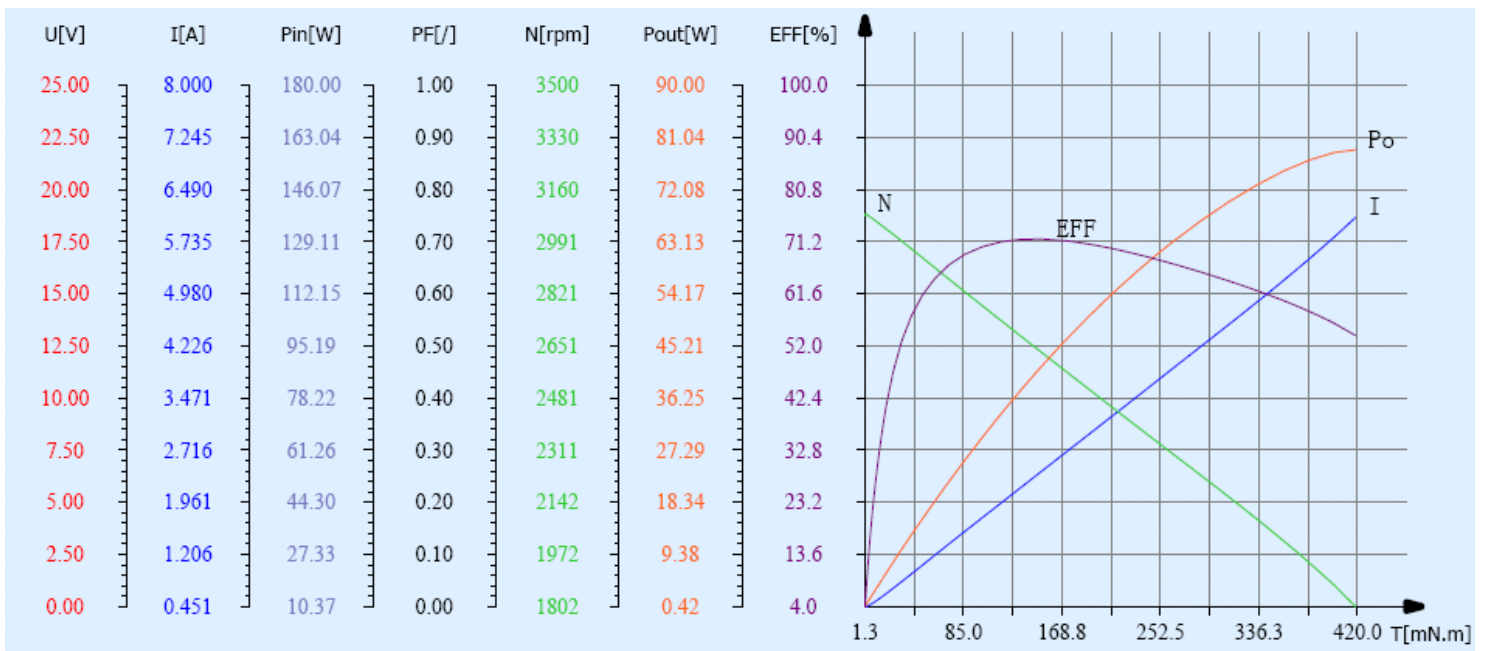

# Jundi DC Motor CO.,LTD

## • Motor Dynamic Test Data (电机动态测试数据)

项次 NO.	电压V	电流A	输入功率W	功率因数PF	频率Hz	转矩mN.m	转速rpm	输出功率W	效率%
1	24.06	0.453	10.43	1.000	0.00	1.3	3078	0.42	4.0
2	24.06	0.454	10.45	1.000	0.00	1.4	3078	0.45	4.3
3	24.06	0.454	10.43	1.000	0.00	1.8	3078	0.58	5.6
4	24.06	0.452	10.39	1.000	0.00	2.8	3080	0.90	8.7
5	24.06	0.451	10.37	1.000	0.00	3.2	3079	1.03	9.9
6	24.06	0.451	10.38	1.000	0.00	3.1	3080	1.00	9.6
7	24.06	0.453	10.43	1.000	0.00	2.2	3080	0.71	6.8
8	24.06	0.456	10.52	1.000	0.00	2.6	3079	0.84	8.0
9	24.06	0.465	10.76	1.000	0.00	3.0	3075	0.97	9.0
10	24.06	0.481	11.17	1.000	0.00	4.5	3072	1.45	13.0
11	24.06	0.503	11.73	1.000	0.00	6.2	3064	1.99	17.0
12	24.06	0.535	12.54	1.000	0.00	12.3	3055	3.93	31.4
13	24.05	0.579	13.61	1.000	0.00	13.2	3047	4.21	30.9
14	24.05	0.630	14.90	1.000	0.00	21.3	3033	6.76	45.4
15	24.05	0.695	16.51	1.000	0.00	26.5	3014	8.36	50.6
16	24.05	0.774	18.47	1.000	0.00	32.4	2998	10.17	55.1
17	24.05	0.935	22.40	1.000	0.00	40.1	2973	12.48	55.7
18	24.05	1.058	25.45	1.000	0.00	47.8	2944	14.74	57.9
19	24.05	1.201	28.95	1.000	0.00	59.5	2909	18.12	62.6
20	24.05	1.356	32.65	1.000	0.00	71.7	2861	21.48	65.8
21	24.05	1.535	37.03	1.000	0.00	86.1	2818	25.41	68.6
22	24.05	1.732	41.75	1.000	0.00	104.0	2793	30.42	72.8
23	24.04	1.946	46.95	1.000	0.00	114.6	2726	32.71	69.7
24	24.04	2.183	52.69	1.000	0.00	133.9	2700	37.86	71.8
25	24.04	2.426	58.55	1.000	0.00	153.6	2624	42.20	72.1
26	24.04	2.692	64.96	1.000	0.00	174.4	2560	46.75	72.0
27	24.04	2.973	71.75	1.000	0.00	191.8	2496	50.13	69.9

