


JD-63ZYT12-4928

Magnet (磁铁): Ferrite 铁氧体
 Insulation Class 绝缘等级: B , F
 Protection 防护等级: No
 Shaft OD 出轴直径: 8 ~ 12mm
 Bearing 轴承: Ball / Sleeve
 Winding 绕线选择:


1. 工作电压范围: 6 ~ 36VDC
2. 额定转速范围: 2,000 ~ 12,000 RPM
3. 输出功率范围: 25 ~ 150 W



Motor Dimensions (外形尺寸图)

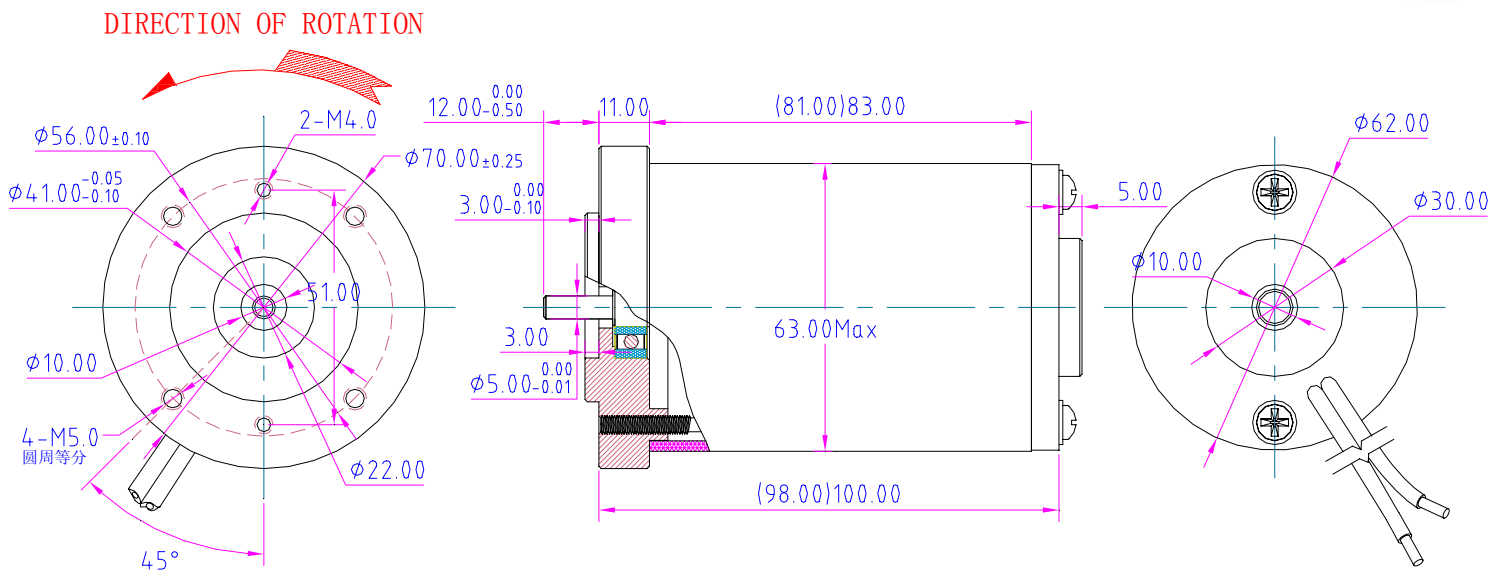

Motor Test Curve (电机特性曲线)

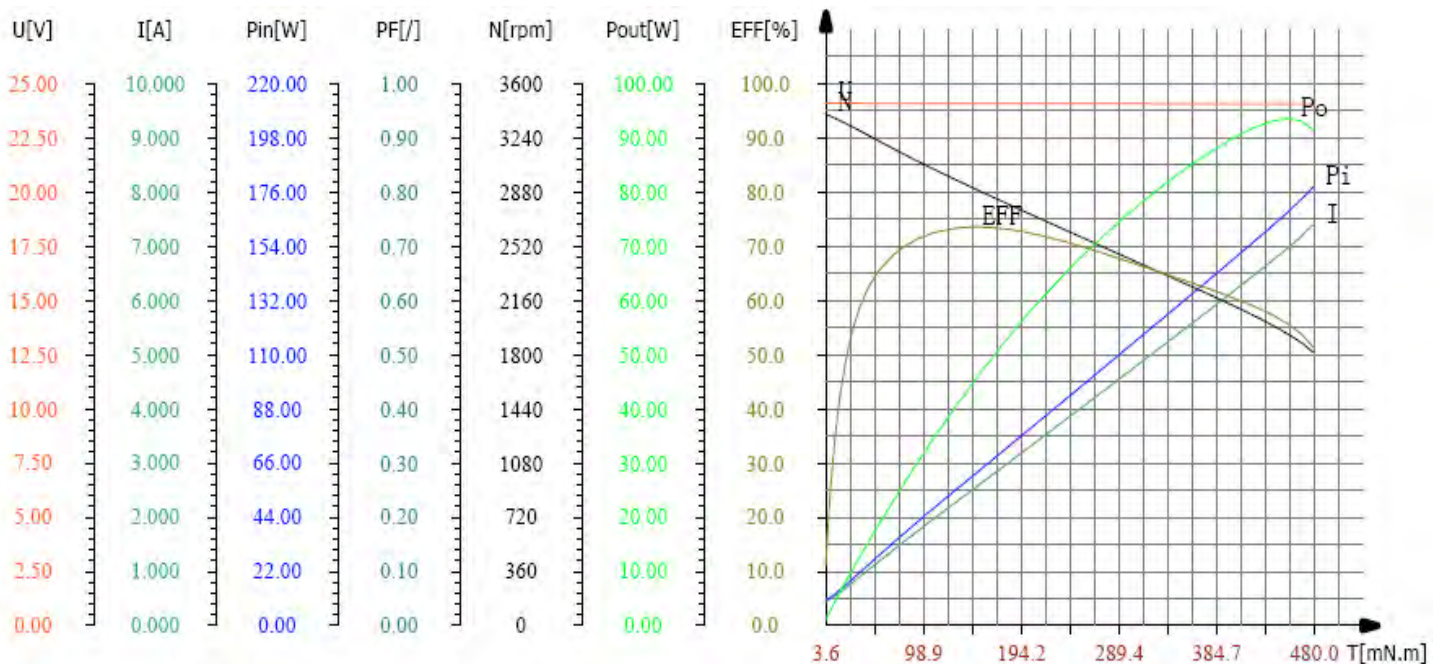

Jundi DC Motor CO.,LTD

• Motor Dynamic Test Data (电机动态测试数据)

项次 NO.	电压V	电流A	输入功率W	功率因数PF	频率Hz	转矩mN.m	转速rpm	输出功率W	效率%
1	24.10	0.460	10.62	1.000	0.00	3.6	3401	1.28	12.1
2	24.10	0.458	10.57	1.000	0.00	3.6	3401	1.28	12.1
3	24.10	0.457	10.53	1.000	0.00	3.6	3401	1.28	12.2
4	24.09	0.455	10.50	1.000	0.00	3.6	3402	1.28	12.2
5	24.09	0.455	10.47	1.000	0.00	3.6	3401	1.28	12.2
6	24.09	0.454	10.48	1.000	0.00	3.7	3401	1.32	12.6
7	24.10	0.460	10.62	1.000	0.00	4.1	3400	1.46	13.7
8	24.10	0.472	10.92	1.000	0.00	4.9	3395	1.74	15.9
9	24.10	0.491	11.43	1.000	0.00	5.7	3390	2.02	17.7
10	24.10	0.518	12.07	1.000	0.00	7.7	3374	2.72	22.5
11	24.10	0.555	12.98	1.000	0.00	13.2	3360	4.64	35.8
12	24.10	0.604	14.16	1.000	0.00	18.3	3350	6.42	45.3
13	24.10	0.664	15.63	1.000	0.00	23.2	3338	8.11	51.9
14	24.09	0.735	17.43	1.000	0.00	29.7	3318	10.32	59.2
15	24.09	0.913	21.88	1.000	0.00	36.1	3292	12.44	56.9
16	24.09	1.039	25.00	1.000	0.00	45.1	3274	15.46	61.8
17	24.09	1.183	28.55	1.000	0.00	52.8	3233	17.87	62.6
18	24.09	1.350	32.61	1.000	0.00	65.4	3192	21.86	67.0
19	24.09	1.533	37.04	1.000	0.00	79.0	3117	25.78	69.6
20	24.09	1.740	42.10	1.000	0.00	93.7	3080	30.22	71.8
21	24.09	1.959	47.43	1.000	0.00	106.0	3022	33.54	70.7
22	24.09	2.200	53.22	1.000	0.00	124.0	2961	38.45	72.2
23	24.09	2.460	59.50	1.000	0.00	143.0	2948	44.14	74.2
24	24.08	2.741	66.31	1.000	0.00	163.4	2850	48.76	73.5
25	24.08	3.037	73.45	1.000	0.00	185.3	2806	54.45	74.1
26	24.08	3.353	81.12	1.000	0.00	208.6	2728	59.59	73.5
27	24.08	3.687	89.11	1.000	0.00	228.2	2650	63.32	71.1

地址：浙江省余姚市经济开发区B区横三路。TEL：0574-62820655/62831828，FAX：0574-62823099

E-mail：jundi@mail.nbptt.zj.cn / jundi@vip.163.com 网址：<http://www.jdmotor.com>

