


JD-60ZYT12-6212

Magnet (磁铁): Ferrite 铁氧体
 Insulation Class 绝缘等级: B , F
 Protection 防护等级: No
 Shaft OD 出轴直径: 8 ~ 12mm
 Bearing 轴承: Ball / Sleeve
 Winding 绕线选择:


1. 工作电压范围: 6 ~ 36VDC
2. 额定转速范围: 2,000 ~ 12,000 RPM
3. 输出功率范围: 25 ~ 150 W



Motor Dimensions (外形尺寸图)

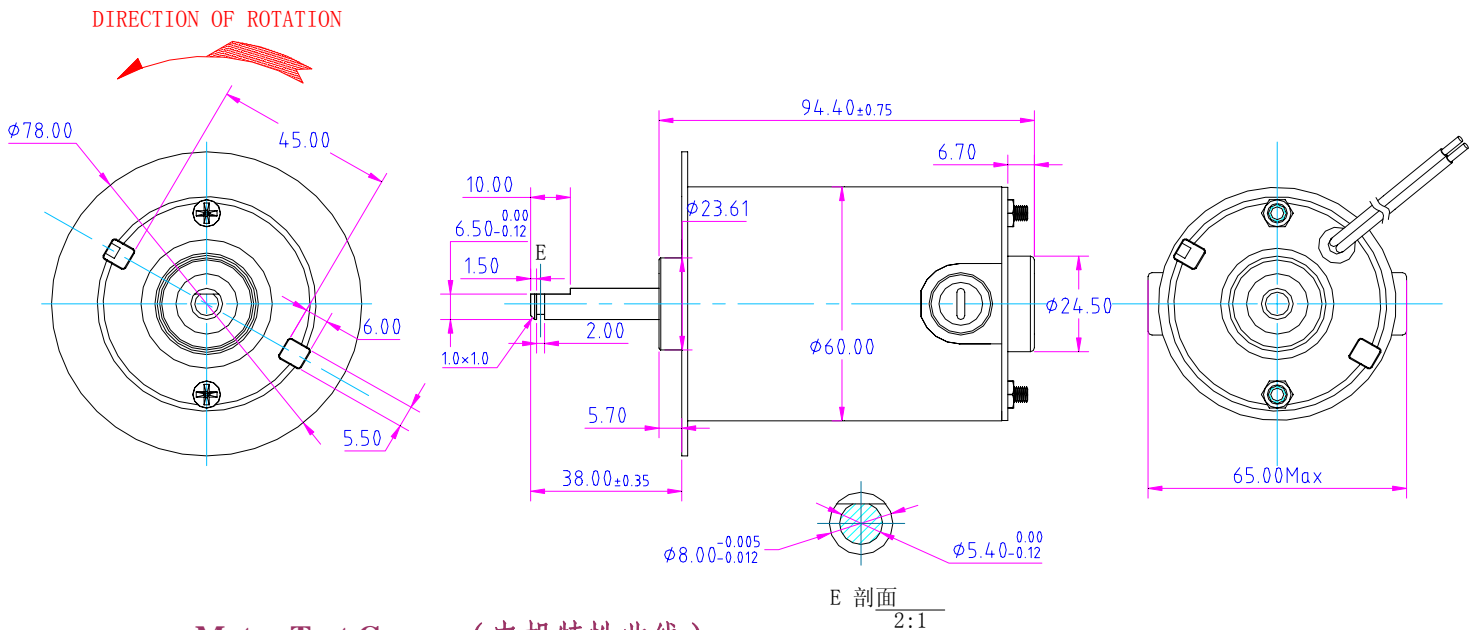

Motor Test Curve (电机特性曲线)

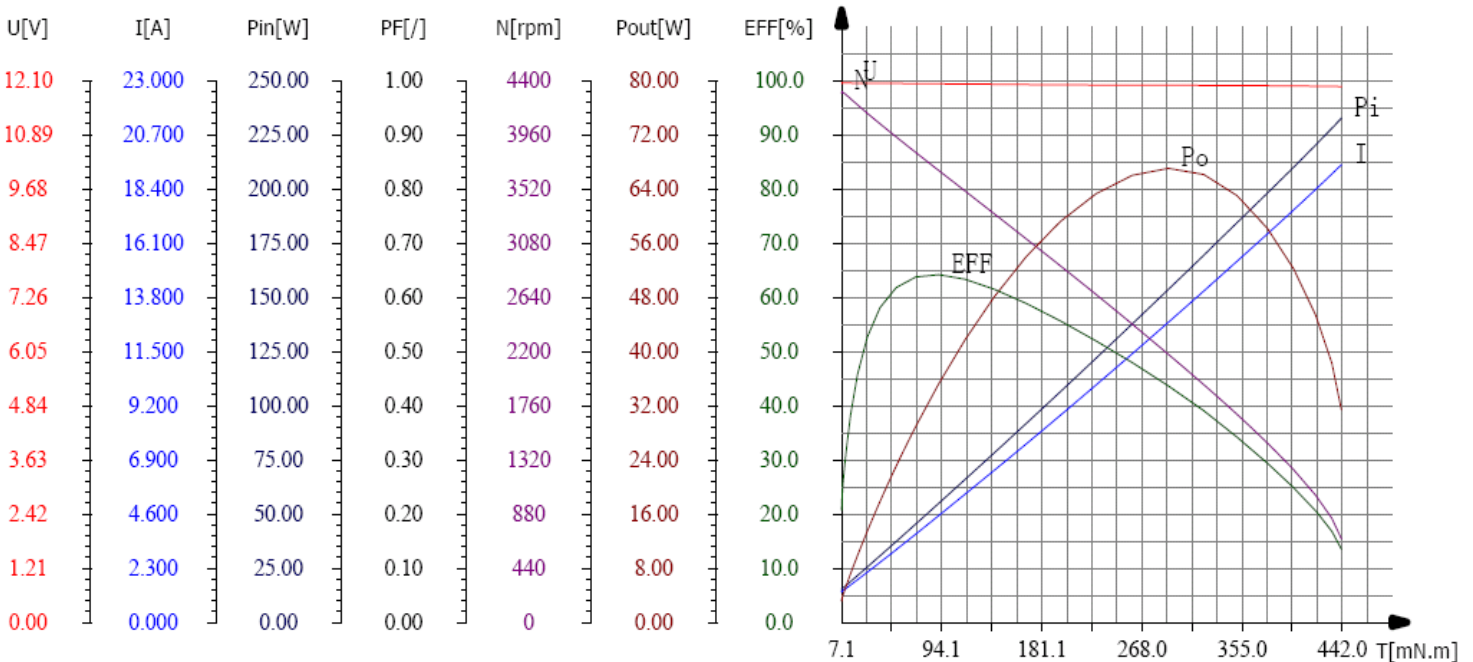

Jundi DC Motor CO.,LTD

Motor Dynamic Test Data (电机动态测试数据)

项次 NO.	电压V	电流A	输入功率W	功率因数PF	频率Hz	转矩mN.m	转速rpm	输出功率W	效率%
1	12.04	1.313	15.41	1.000	0.00	7.1	4298	3.20	20.7
2	12.04	1.310	15.36	1.000	0.00	7.1	4301	3.20	20.8
3	12.04	1.302	15.25	1.000	0.00	7.1	4297	3.19	20.9
4	12.04	1.303	15.27	1.000	0.00	7.1	4301	3.20	20.9
5	12.04	1.315	15.41	1.000	0.00	7.5	4302	3.38	21.9
6	12.04	1.364	16.04	1.000	0.00	8.2	4297	3.69	23.0
7	12.04	1.575	18.80	1.000	0.00	15.2	4272	6.80	36.2
8	12.04	1.796	21.57	1.000	0.00	21.4	4189	9.39	43.5
9	12.04	2.076	24.71	1.000	0.00	28.2	4114	12.15	49.2
10	12.03	2.513	30.35	1.000	0.00	39.3	4089	16.83	55.5
11	12.03	3.026	36.68	1.000	0.00	53.8	3952	22.26	60.7
12	12.03	3.670	44.43	1.000	0.00	67.7	3814	27.04	60.9
13	12.02	4.419	53.64	1.000	0.00	88.5	3638	33.71	62.8
14	12.02	5.366	64.94	1.000	0.00	112.1	3533	41.47	63.9
15	12.01	6.375	77.18	1.000	0.00	139.0	3318	48.29	62.6
16	12.01	7.519	91.07	1.000	0.00	168.3	3098	54.60	60.0
17	12.00	8.763	105.87	1.000	0.00	193.0	2967	59.96	56.6
18	12.00	10.043	121.23	1.000	0.00	226.0	2698	63.85	52.7
19	11.99	11.042	134.47	1.000	0.00	259.3	2408	65.38	48.6
20	11.98	12.724	153.41	1.000	0.00	293.1	2140	65.68	42.8
21	11.98	14.074	169.53	1.000	0.00	319.5	1976	66.11	39.0
22	11.98	15.369	184.94	1.000	0.00	350.3	1671	61.29	33.1
23	11.98	16.585	199.35	1.000	0.00	379.6	1403	55.77	28.0
24	11.97	17.588	210.96	1.000	0.00	399.6	1154	48.29	22.9
25	11.97	18.403	220.95	1.000	0.00	418.9	1035	45.40	20.5
26	11.97	18.998	227.26	1.000	0.00	433.1	842	38.19	16.8
27	11.96	19.420	232.50	1.000	0.00	441.4	679	31.38	13.5

地址：浙江省余姚市经济开发区B区长庆路15号。TEL: 0574-62820655/62831828, FAX: 0574-62823099

E-mail: jundi@mail.nbptt.zj.cn / jundi@vip.163.com 网址: <http://www.jdmotor.com>